




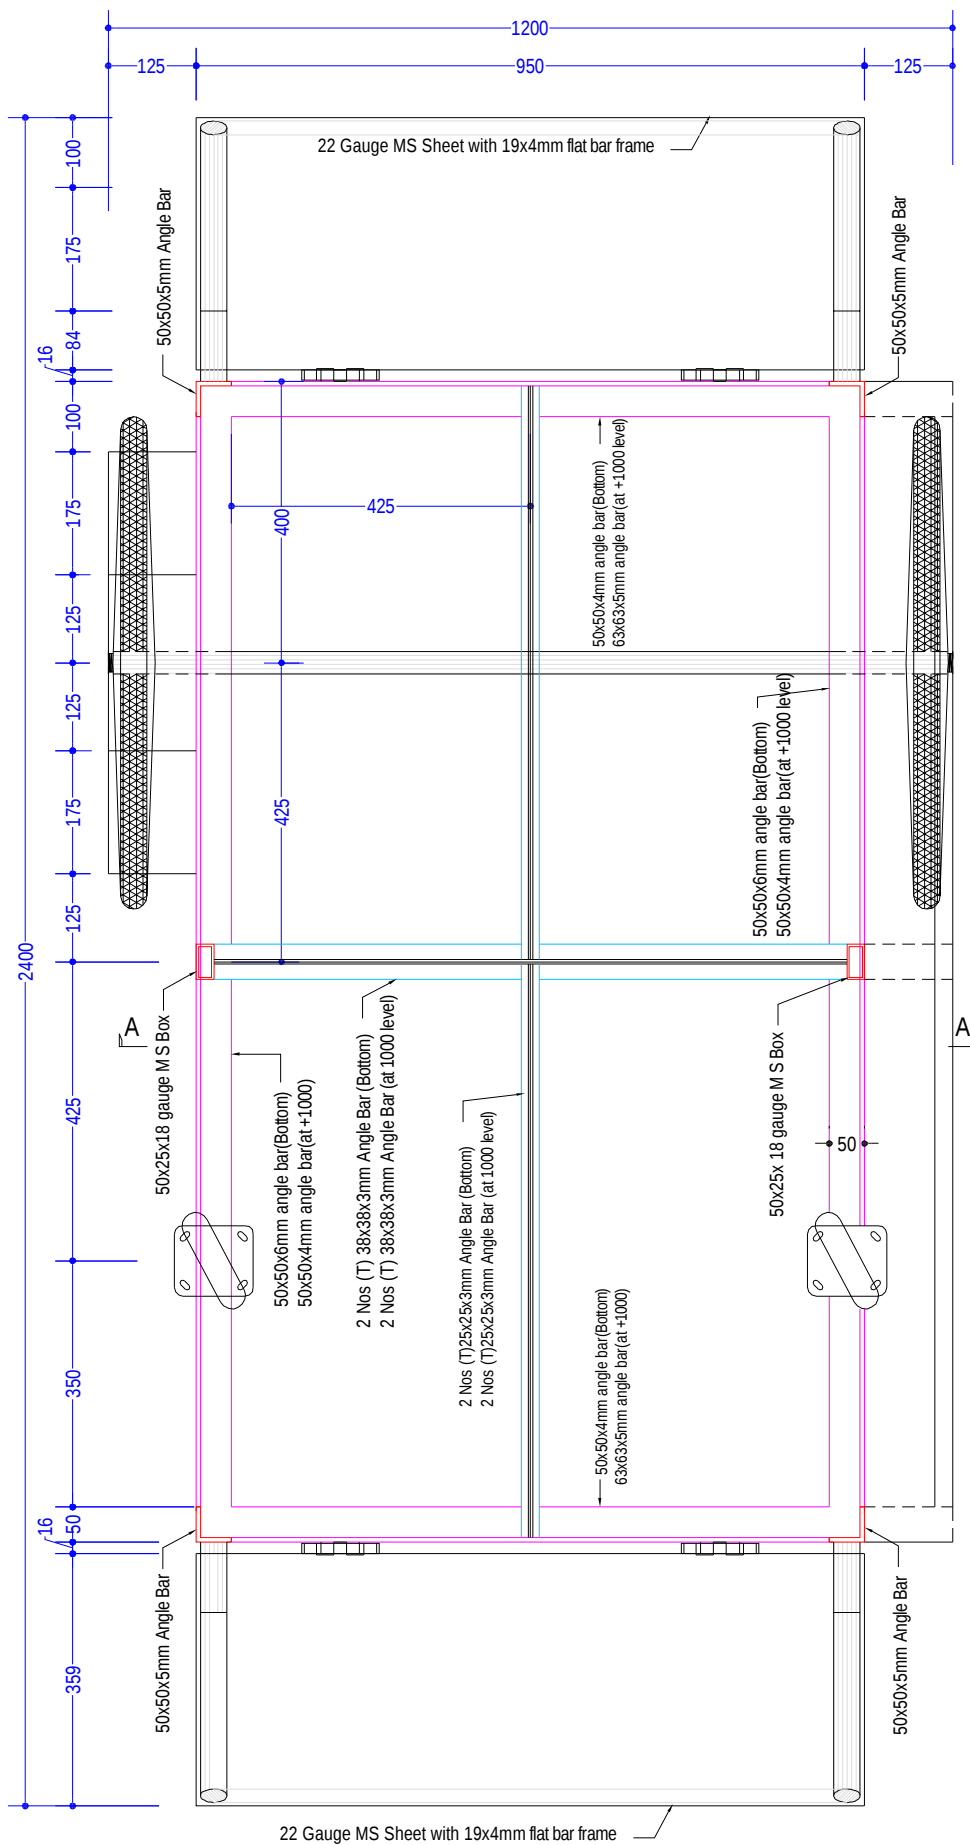

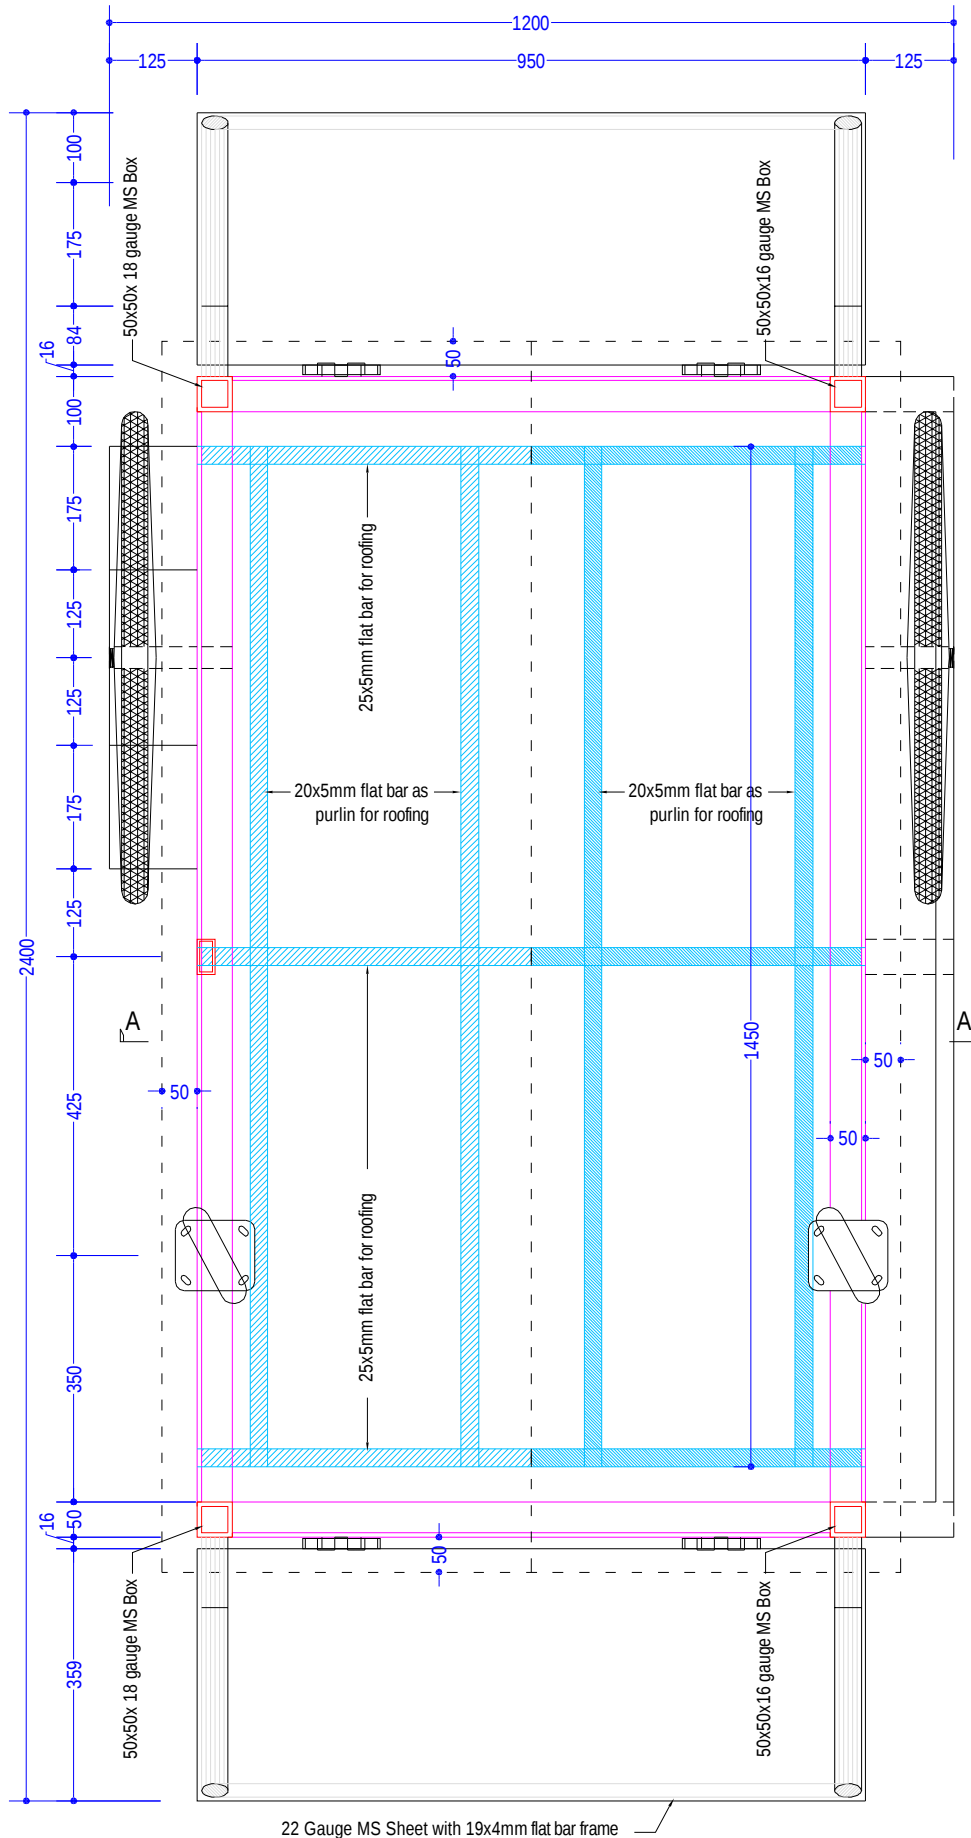


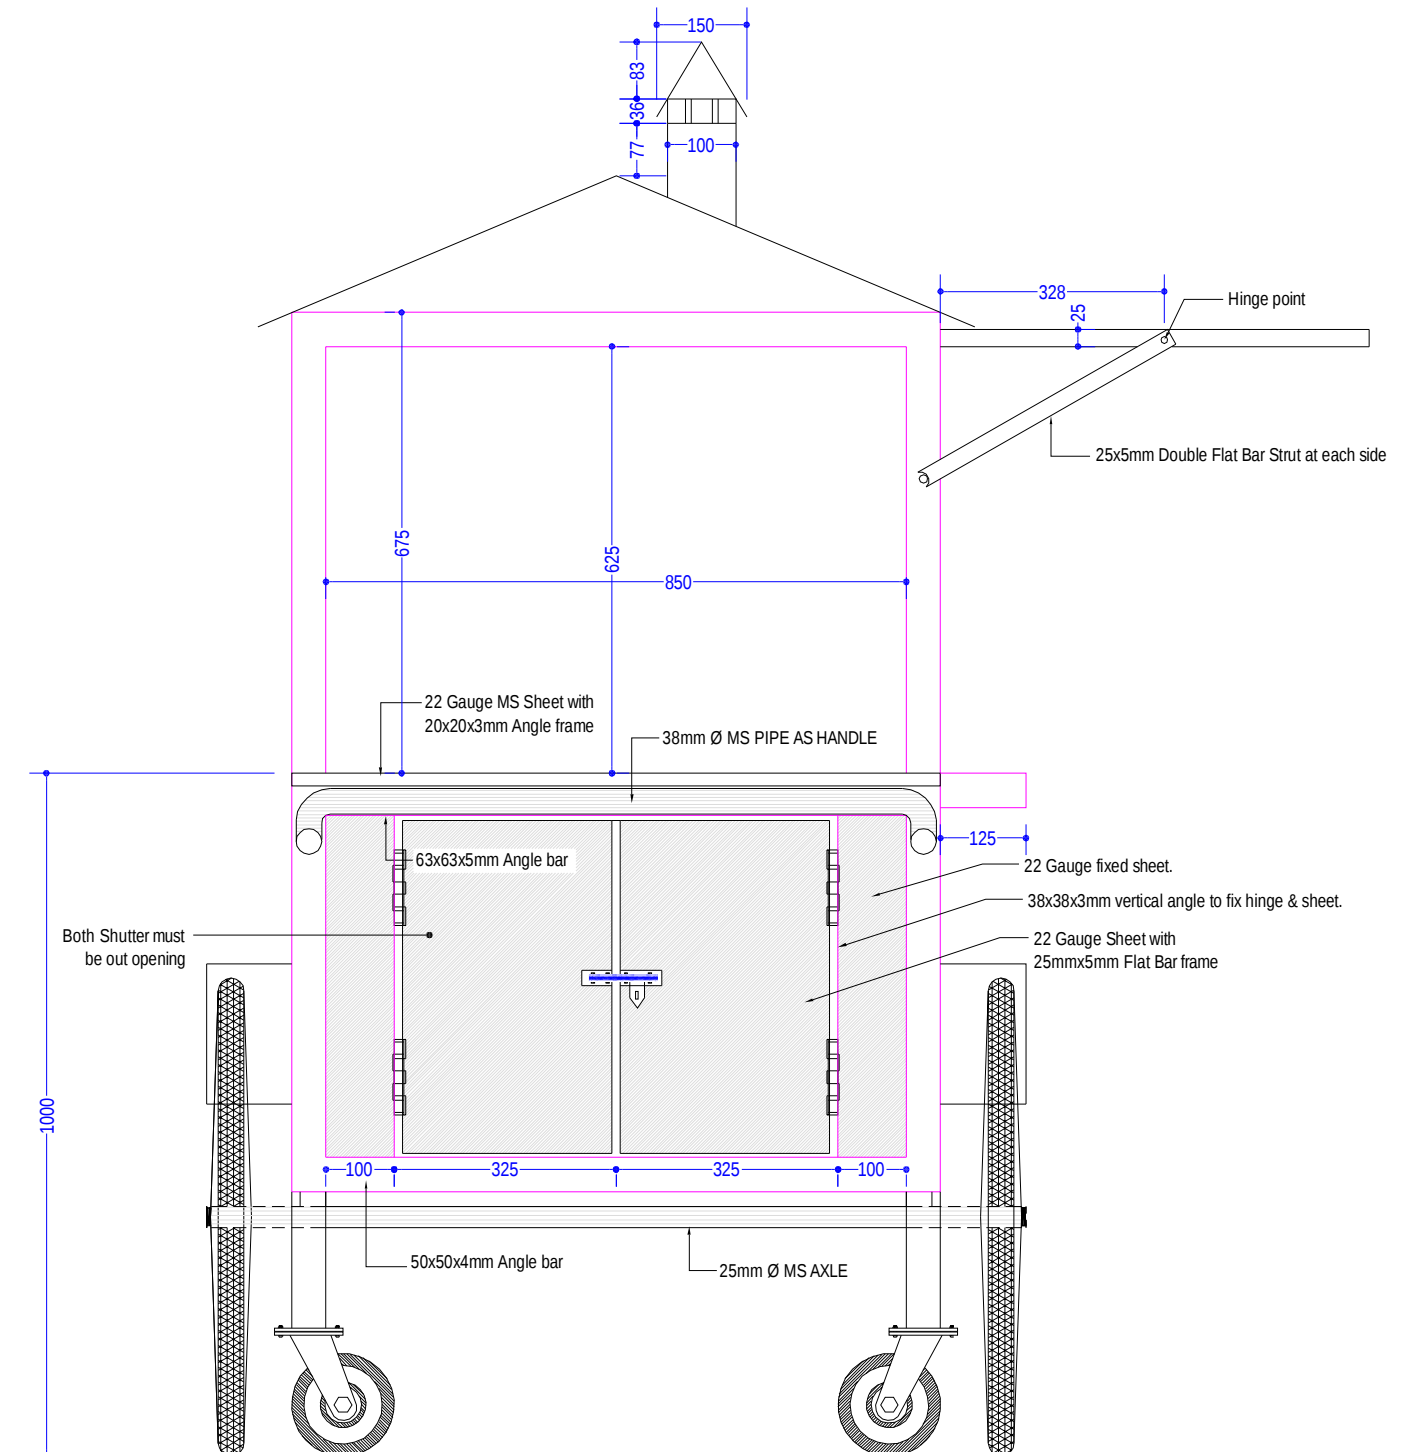

Back Elevation of Street Cart (When Open side shutter open)

Technical Notes:

1. Horizontal frame level must be maintain by spirit level. Before checking the frame level, level tools (Spirit level) & flate from level where to be set the cart must be check.
2. A filled weld may be placed either on one side or both sides, depending on the requirements of the work. The weld metal should fuse into or penetrate the corner formed between the two member.
3. To avoid slag inclusions of welding, welding should be maintain uniform travel speed, tighter weaving motion & slag left on the previous weld pass.
4. To avoid porosity of welding, welding should be lowering the welding current, cleaning the surface of the base metal, redrying electrodes and changing a different base metal with a different composition.
5. All the dimension provided in the drawing are in mm.
6. All the construction member must be uniform in size, adequate strength and standard unit weight.
7. Due to market availability / necessity of practical work or any others reason, member size, shape, thickness etc can be modify But with consent of Engineer.

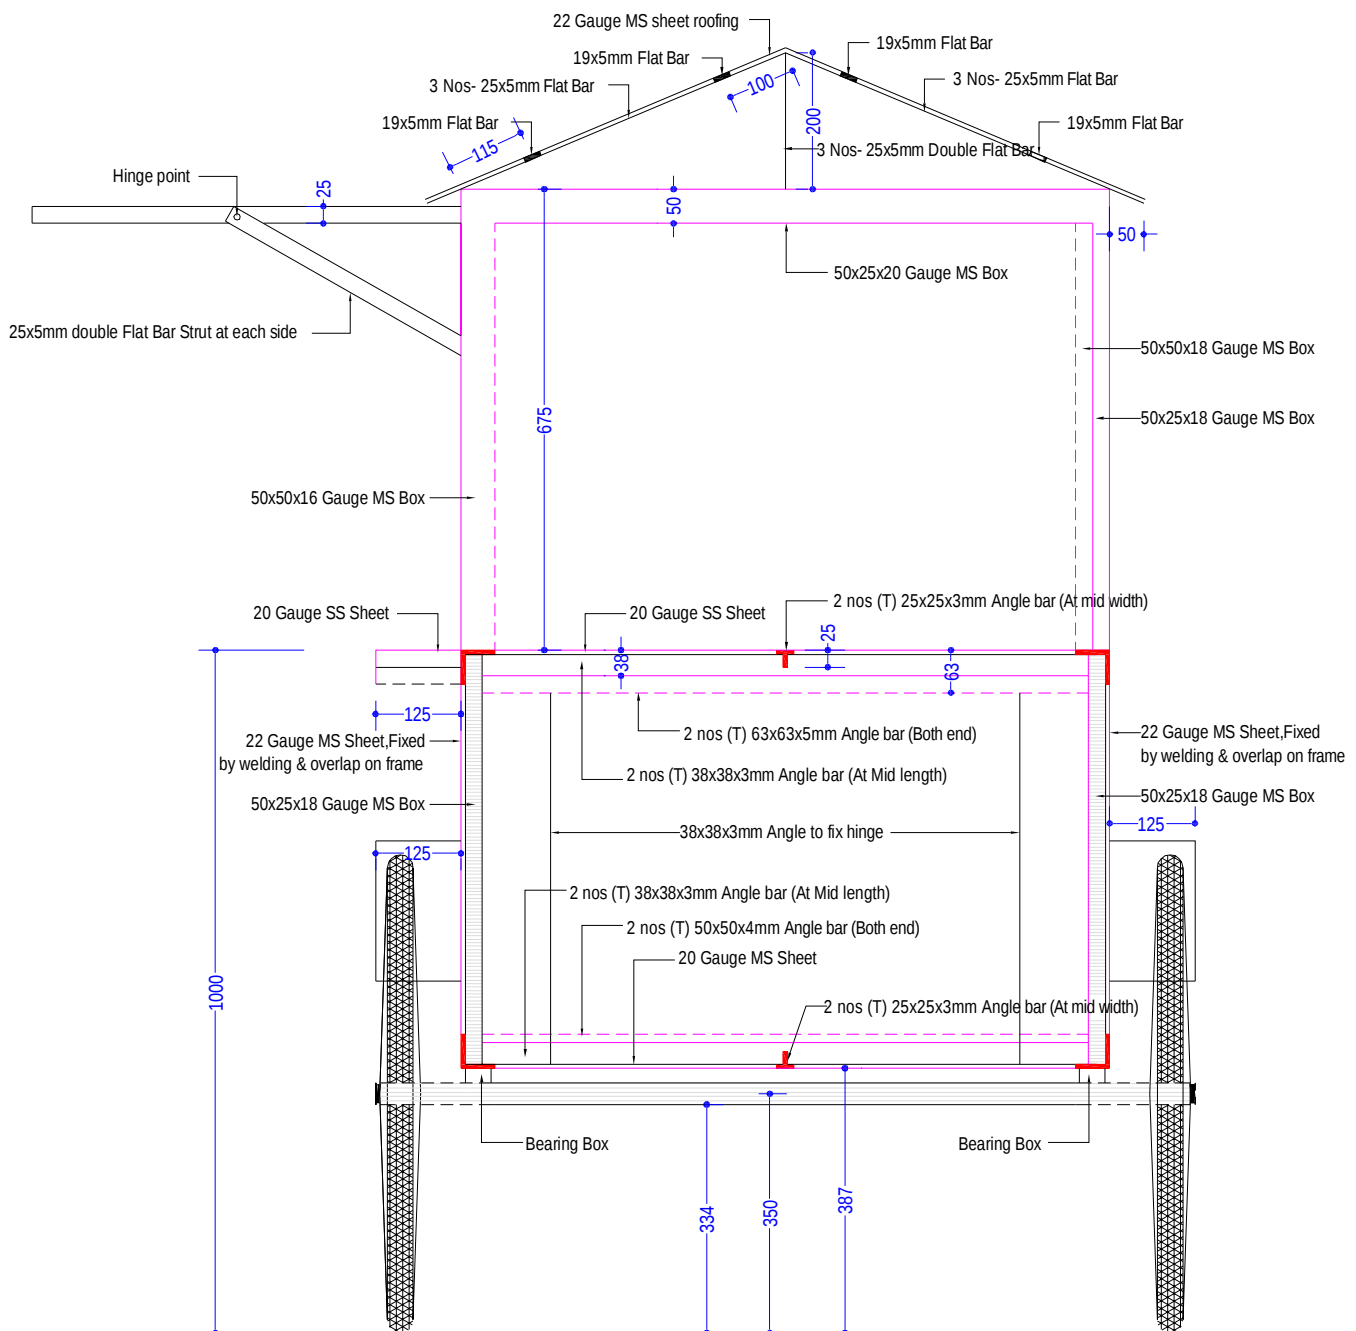

Section on A-A

3D Image - 1



3D Image - 2



Image -3 (Frame)

